


Wilton

14' x 20'

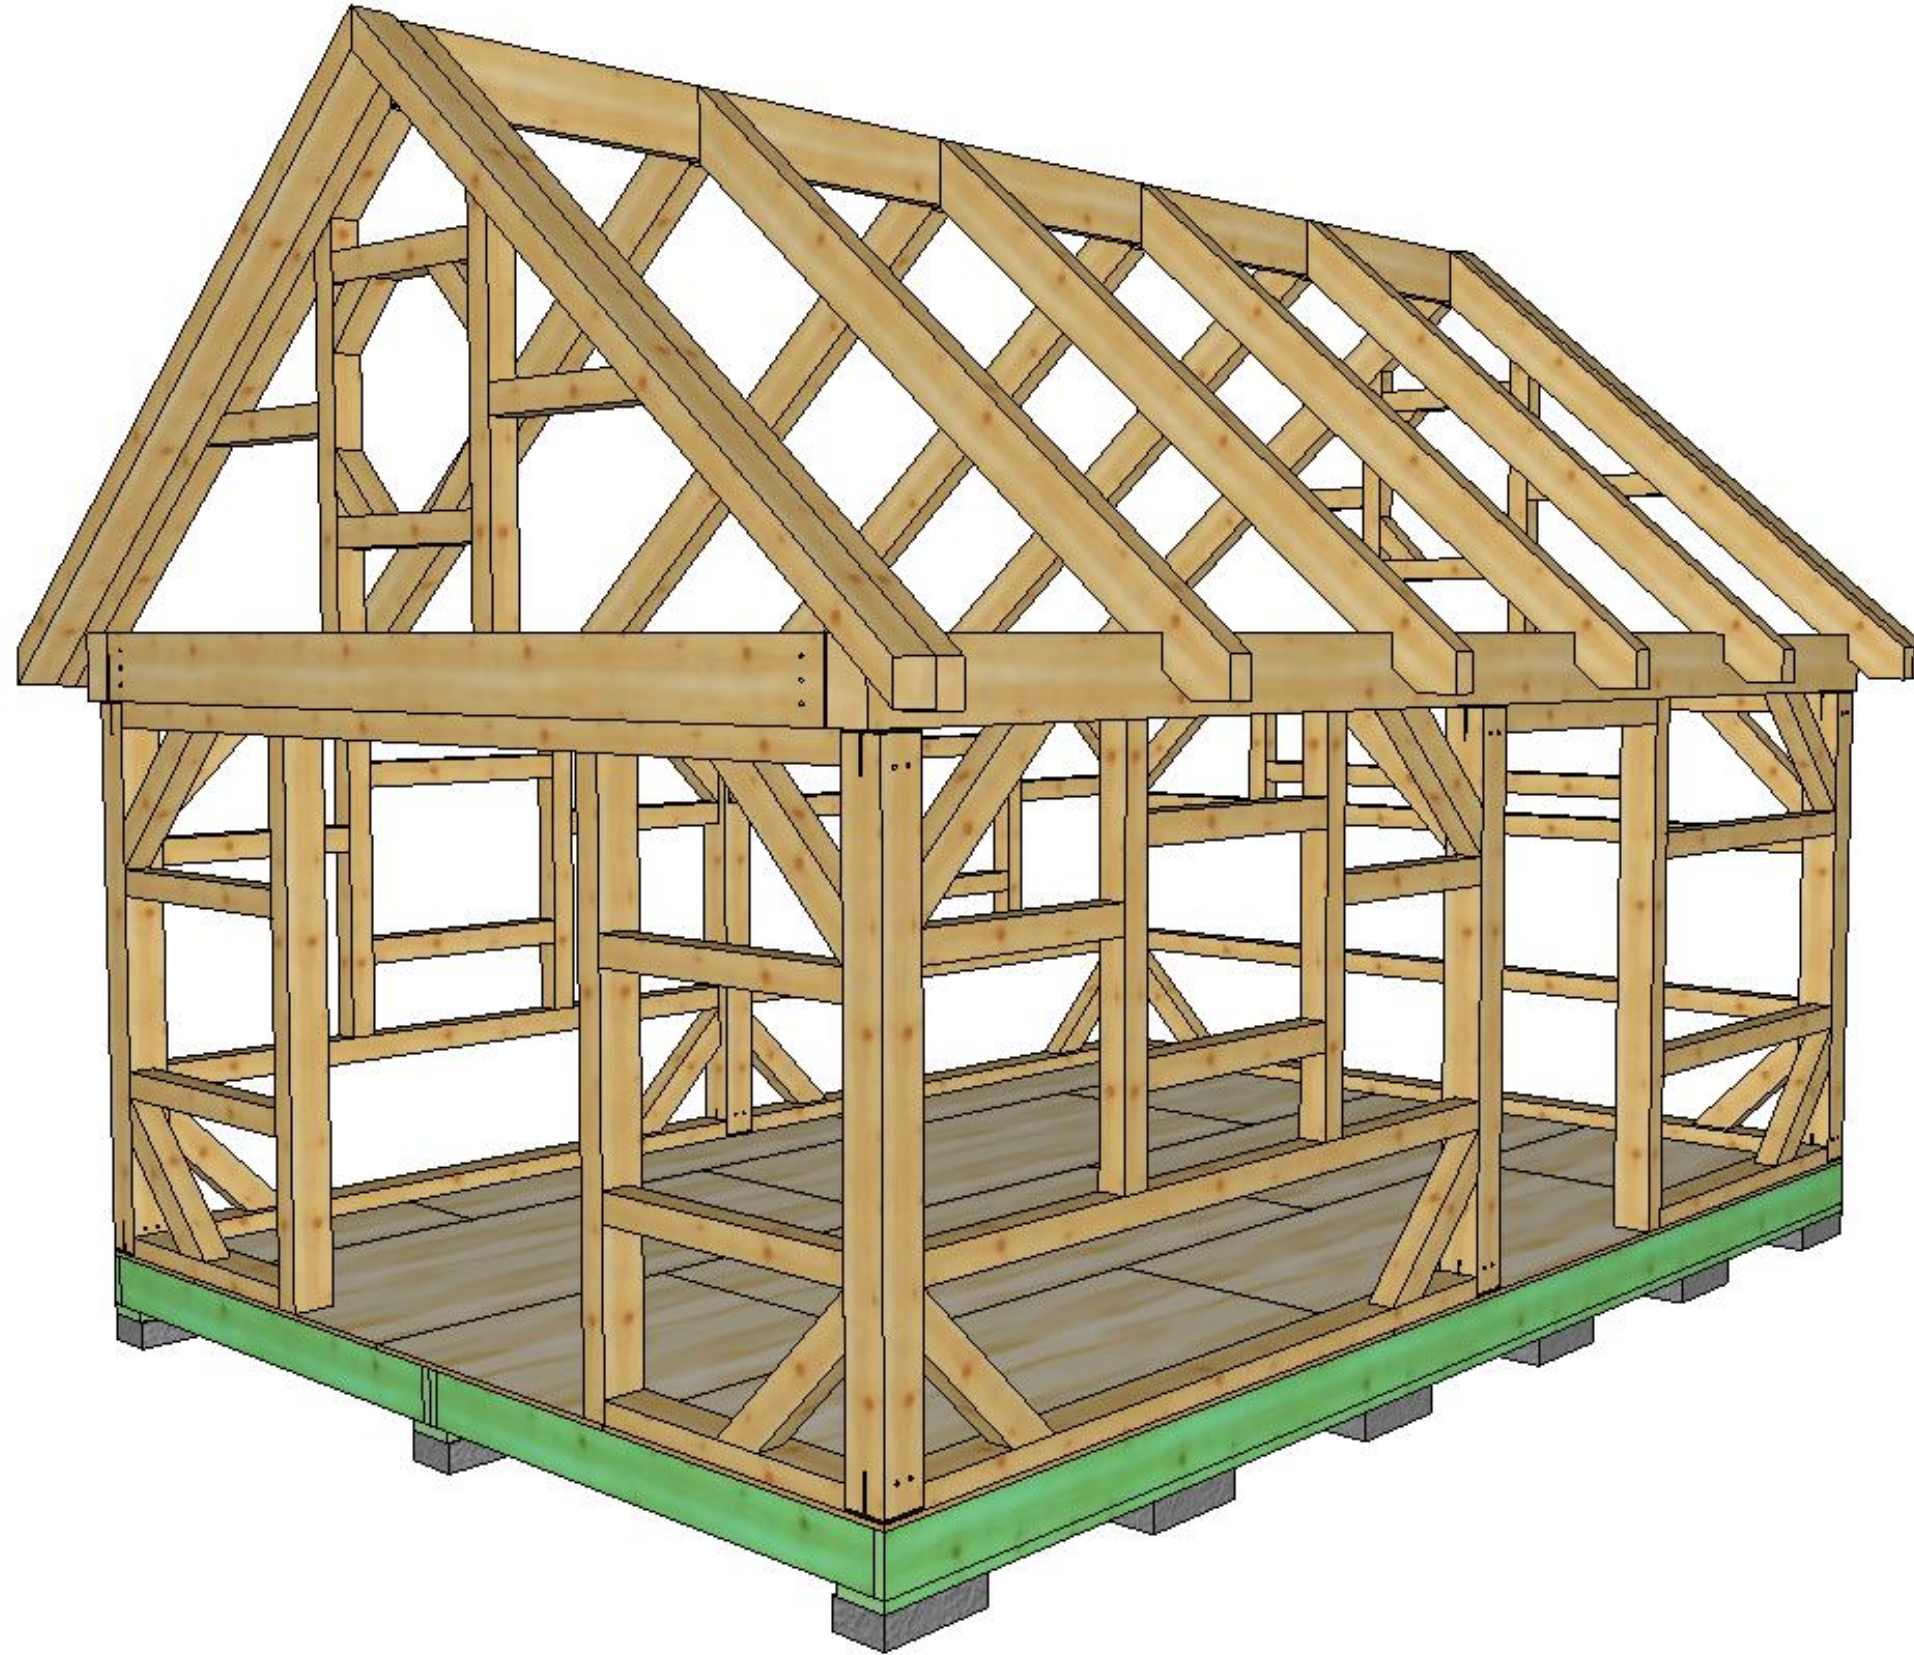

To be printed on- **11 x 17 Tabloid**

*All timbers shall be equivalent to Eastern White Pine
No. 2 or better unless otherwise noted*



COPYRIGHT LAWS PROHIBIT
REPRODUCTION OR USE OF THIS
DRAWING, IN WHOLE OR IN PART,
WITHOUT THE EXPRESSED WRITTEN
PERMISSION OF CONNEXT
POST AND BEAM, LLC.

DO NOT SCALE DIMENSIONS ON
THESE DRAWINGS. THESE IMAGES
ARE MACHINE REPRODUCTIONS AND
MAY CONTAIN A MARGIN OF ERROR.

CONNEXT
POST & BEAM
14' x 20'





Revisions:
3/23/2020

DRAWING INFO:
Cover Sheet

DRAWING No. 000
PRINTED: 4/22/2021

Sample Elevations:

Scale: 1/4" = 1'-0"

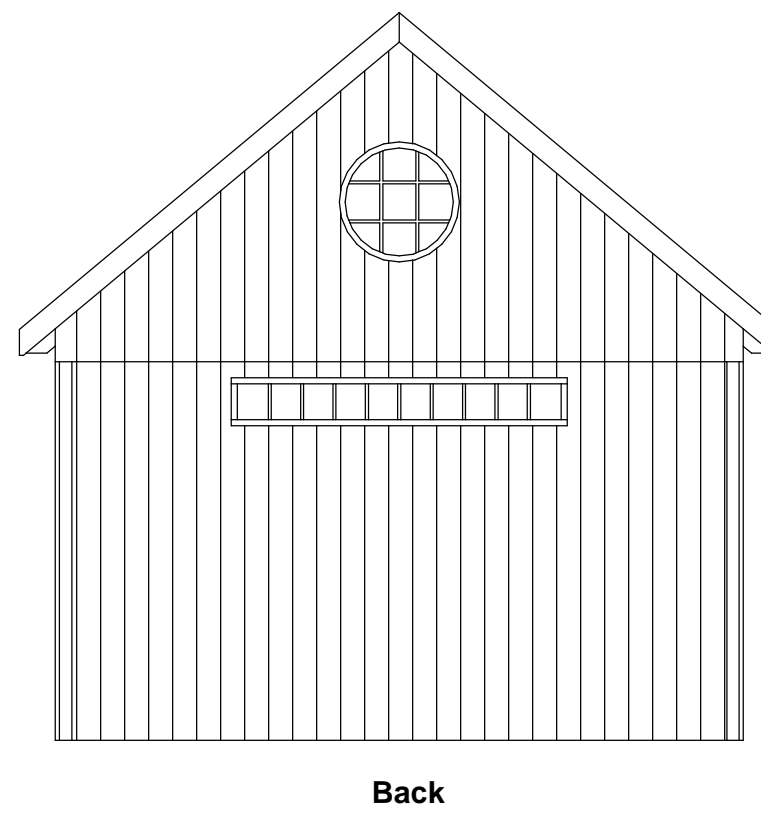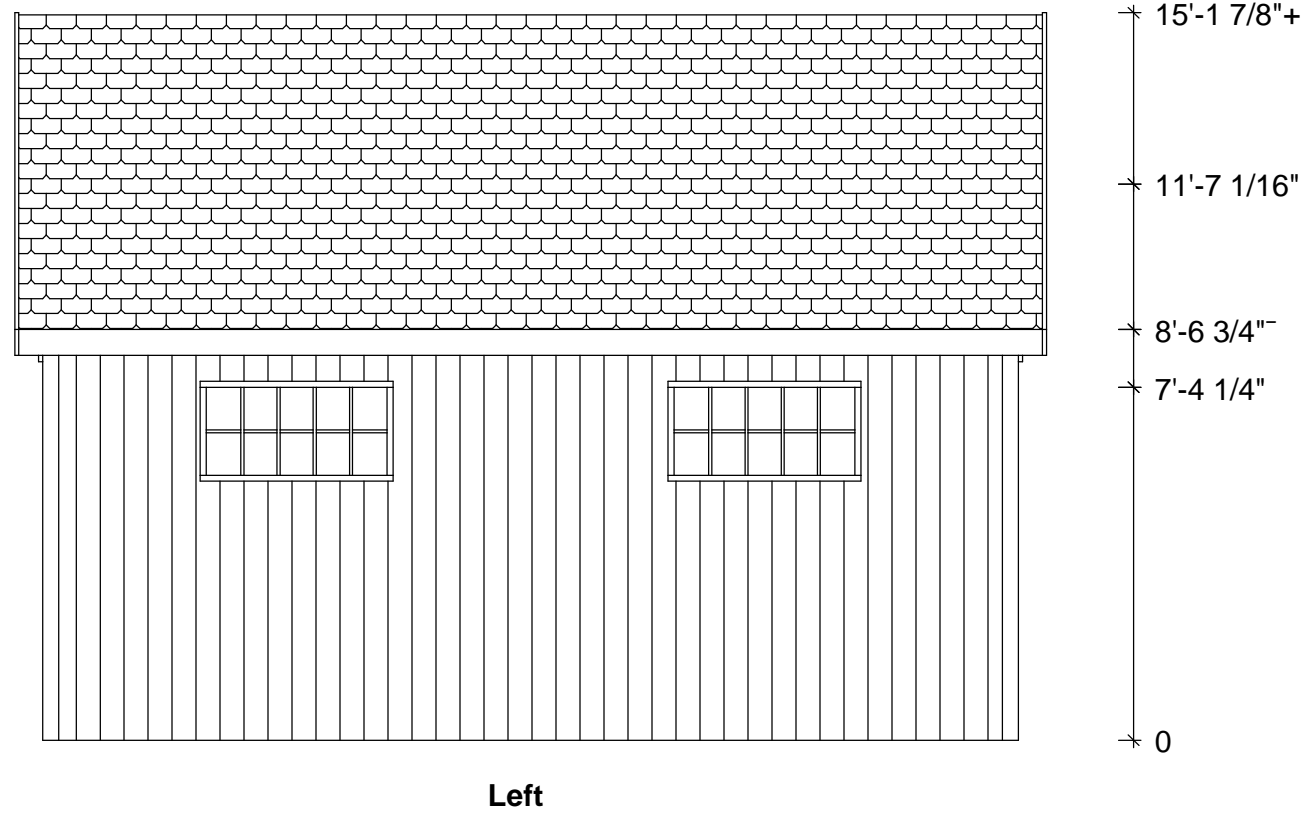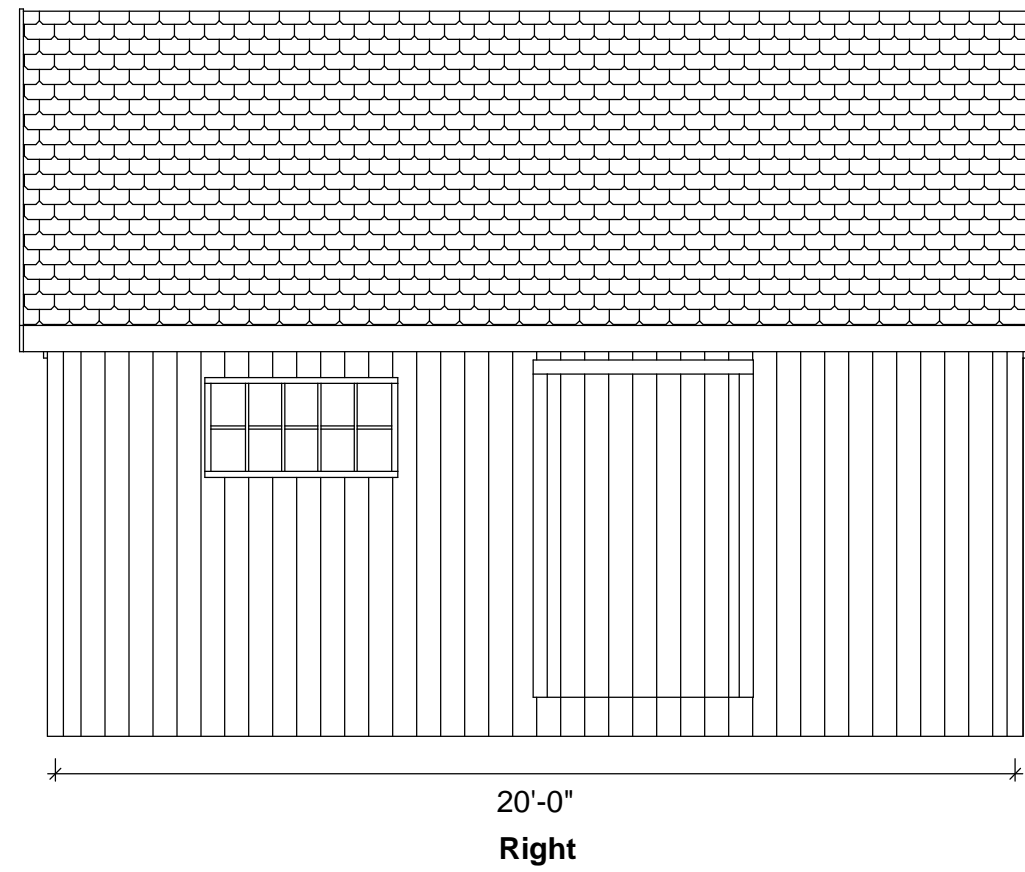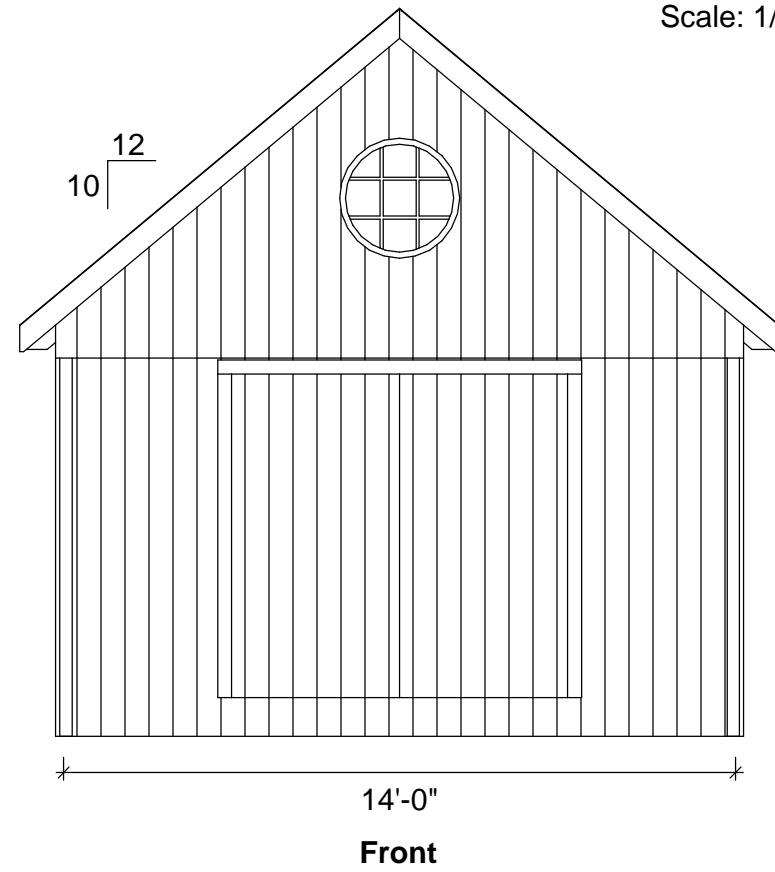

COPYRIGHT LAWS PROHIBIT REPRODUCTION OR USE OF THIS DRAWING, IN WHOLE OR IN PART, WITHOUT THE EXPRESSED WRITTEN PERMISSION OF CONNEXT POST AND BEAM, LLC.

DO NOT SCALE DIMENSIONS ON THESE DRAWINGS. THESE IMAGES ARE MACHINE REPRODUCTIONS AND MAY CONTAIN A MARGIN OF ERROR.

CONNEXT
POST & BEAM
14' x 20'

Revisions:
3/3/2020

DRAWING INFO:
Elevations

DRAWING No. 001
PRINTED: 4/22/2021

Timber List

Wood Type	Part	Label	Pcs.	W[in]	H[in]	L[ft]	Volume[BF]
PT	Joist Trimmer	JT1	7	2	8	20'	187
PT	Joist Trimmer	JT2	32	2	8	6'-9"	288
EWP	Plate Beam	PB1	2	6	10	20'-4"	203
EWP	Sill Cover	SC1	2	3	6	3'-5 1/2"	10
EWP	Sill Cover	SC1	3	3	6	9'-3"	42
EWP	Sill Cover	SC1	1	3	6	5'-2 1/2"	8
EWP	Sill Cover	SC1	1	3	6	13'	19
EWP	Rafter	R1	12	4	8	10'-4 15/16"	333
EWP	Tie Beam	TB1	3	6	10	12'-11 1/8"	194
EWP	Siding Nailer	SN1	2	4	6	13'	52
EWP	Siding Nailer	SN	8	4	4	1'-1/2"	12
EWP	Siding Nailer	SN	4	4	4	2'-4 11/16"	13
EWP	Siding Nailer	SN	4	4	4	4'-5 7/16"	24
EWP	Siding Nailer	SN	4	4	4	2'-6"	13
EWP	Siding Nailer	SN	4	4	4	3'-5 1/2"	18
EWP	Post	P1	6	6	6	6'-11 1/8"	125
EWP	Siding Nailer	SN2	3	4	4	9'-3"	37
EWP	Siding Nailer	SN	6	4	4	2'-9 3/8"	22
EWP	Door Post	DP2	2	4	6	6'-8"	27
EWP	Siding Nailer	SN	6	4	4	4'-7 3/4"	37
EWP	Siding Nailer	SN	6	4	4	3'-1/4"	24
EWP	Door Post	DP3	1	4	6	3'-8 1/2"	7
EWP	Post	J1	3	6	6	9'-4 1/8"	84
EWP	Siding Nailer	SN	2	4	4	5'-2 1/2"	14
EWP	Door Post	DP1	1	4	6	7'	14
EWP	Siding Nailer	SN	2	4	4	13'	35
EWP	Siding Nailer	SN	2	4	4	1'-9 3/16"	4
EWP	Siding Nailer	SN	1	4	4	7'-1/4"	9
EWP	Knee Brace	KB1	24	4	5	2'-6"	100
EWP	Ridge Beam	RB1	1	2	10	20'-4"	34
EWP	Fly Rafter	FR1	4	4	6	10'-6 1/16"	84

Wood Type	Volume[BF]
EWP	1598
PT	475
Total	2073

This timber list and fastener list is just a guideline. Please check and verify that all dimension are correct before ordering materials.

Connex is not responsible for left over materials.

Fastener List

Order no.	Description	Pieces
1/2 x 6" Aluminum Pin	T Rex	54
3-1/2" GRK RSS Screw	T Rex	144
6" GRK RSS Screw	Rafter to Ridge	12
8" GRK RSS Screw	Knee Braces/Fly Rafters	112
10" GRK RSS Screw	Rafter to Plate	12
CR6010	Plate to Tie Beam	6
CR6060	Post to Plate Beam/Joist to Tie Beam	18

General Notes

1). The frame design shown has not been engineered and is only intended as a general outline. It is the sole responsibility of the homeowner and/or contractor to determine if local or state code requires an engineer's stamp on plans before erection. Connex does not design to a specific area and for that matter will not hold any reasonability or warranty plans if plans do not satisfy the requirements of local and/or state building codes.

2). The homeowner/contractor is responsible for locating and the protection of all existing utilities and adjacent structures throughout all phases of construction.

3). The homeowner and/or contractor (builder) is responsible for implementing job site safety and construction procedures in accordance with national, state, and local safety requirements. The design, adequacy and safety of erection, bracing, shoring, temporary supports, etcetera is the sole responsibility of the builder. The builder is responsible for the stability of the structure prior to the completion of all gravity and lateral framing, roof and floor diaphragms and finish materials. Connex assumes no responsibility for any changes or modifications that may be made to the plans by the builder.

4). These plans do not cover work in areas not explicitly shown on the plans, including stick framed portions, adjacent buildings, basements/crawl- space areas, or any other changes or modifications.

5). Homeowner/contractor shall verify all dimensions and job site conditions before commencing work and shall report any discrepancies to Connex if modifications need to be made.

6). Use written dimensions. Do not use scaled dimensions. Where no dimension is provided, consult Connex for clarification before proceeding with the work.

7). Timbers- Unless otherwise noted, solid sawn timber shall be equivalent to ungraded eastern white pine No. 2 or better. Timbers shall be rough sawn, and sized to full stated dimensions (e.g. 8x8 = 8.0" x 8.0").

8). Timber screws- Unless noted otherwise, all screws shall be GRK RSS, GRK Caliburn or Fastenmaster Timberloks. Screw holes shall not be pre-drilled unless otherwise noted.



COPYRIGHT LAWS PROHIBIT REPRODUCTION OR USE OF THIS DRAWING, IN WHOLE OR IN PART, WITHOUT THE EXPRESSED WRITTEN PERMISSION OF CONNEXT POST AND BEAM, LLC.

DO NOT SCALE DIMENSIONS ON THESE DRAWINGS. THESE IMAGES ARE MACHINE REPRODUCTIONS AND MAY CONTAIN A MARGIN OF ERROR.



Revisions:
4/22/2021

DRAWING INFO:
Timber List

DRAWING No. 012
PRINTED: 4/22/2021